


# Display WW-45 type



## Application and function

The WW-45 digital indicator is designed to be used with any device with a 4...20 mA output signal and has a standard DIN EN 175301-803 connector on its output terminal. The indicator is typically used to give an additional local reading when carrying out remote measurement of absolute or relative pressures. The WW-45 has a configurable range of readings from -999 to 9999; the position of the decimal point is also configurable. It has a red LED display with 7.62 mm high figures. The indicator does not require an external power supply. It is fitted with a configurable open collector (OC) two-state output.

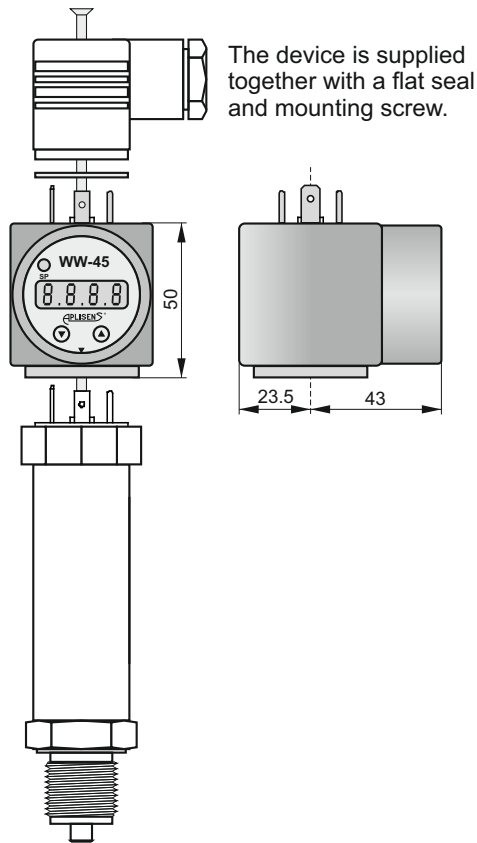

The device is supplied together with a flat seal and mounting screw.

## Technical data

<b>Display error</b>	0.2% ± 1 digit
<b>Display range</b>	-999...9999
<b>Input signal</b>	4...20 mA
<b>Voltage drop</b>	max. 6 V
<b>OC output</b>	90 mA
<b>Ambient temperature</b>	0...70°C
<b>Degree of protection</b>	IP65

## Ordering procedure WW-45